




CHINT

2025 CHINT LED LIGHTING PRODUCTS CATALOGUE

Focus On Manufacture For 41 Years, We Only Do
High Quality Products

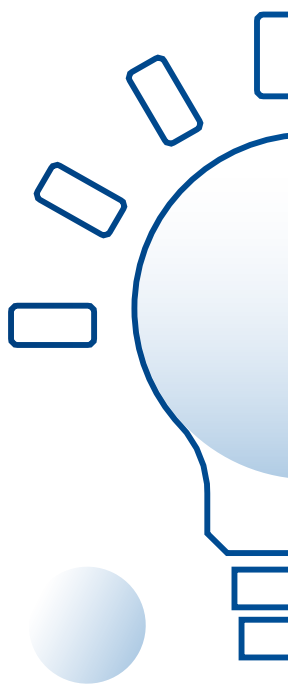



CHINT LEADER OF SOLAR TECHNOLOGY

Headquartered in Hangzhou, capital of Zhejiang Province, Zhejiang CHINT Lighting has two production bases located in Jiangxi and Guangdong. The total production scale exceeds 80,000 square meters. In addition, a new production base is being built in Yueqing city, Zhejiang province. The products include LED lighting, LED solar products, cable, wall switch, air switch, socket and other electrical products. It is expected to go into production in 2023.


Zhejiang CHINT Lighting Co. Ltd is an industrial leading LED lighting company specializes in manufacturing of innovative LED lighting solutions that improve lighting quality, energy efficiency and enhance environmental sustainability. Since 1997, Zhejiang CHINT has produced different types of innovative lighting products which have shaped the today's industry and created remarkable reputation in global market. All of our products are CE, RoHS compliant and factories are ISO14001 certified.

CHINT INTRO

- **1984**
Founded
- **140+**
Covering Countries
and Regions
- **18.3 Billion**
USD Sales Revenue
- **40,000**
Global Employees
- **500,000+**
Creating Jobs in the
Industrial Chains.



DEVELOPMENT

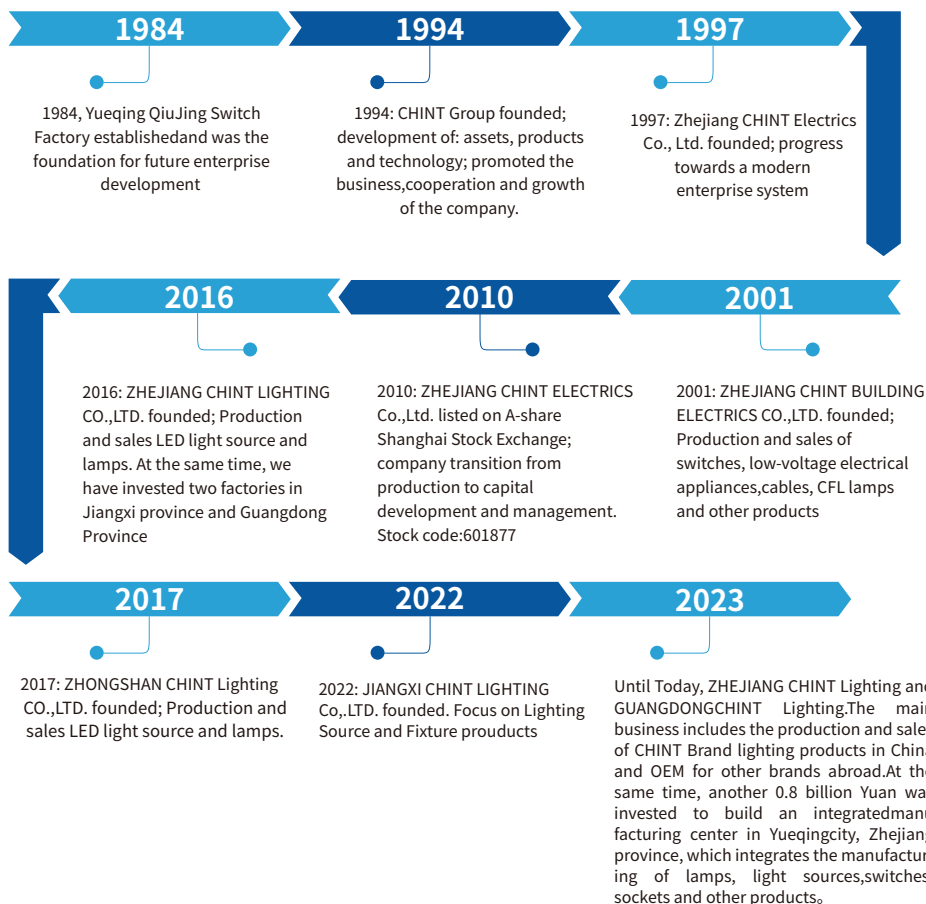



A BULB

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle	Lamp head
CTQP21005	5W	AC100-240V	≥80	6000	Φ45*81mm	80lm/w	AL+Plastic	220°	B22/E27
CTQP21006	6W	AC185-265V	≥80	6000	Φ55*102mm	96lm/w	AL+Plastic	220°	B22/E27
CTQP21008	8W	AC185-265V	≥80	6000	Φ60*108mm	95lm/w	AL+Plastic	220°	B22/E27
CTQP21009	9W	AC185-265V	≥80	6000	Φ60*108mm	116lm/w	AL+Plastic	220°	B22/E27



CANDLE BULB



Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle	Lamp head
CTQP22003	3W	AC100-240V	≥80	3000	Φ45*81mm	80lm/w	AL+Plastic	220°	E22/E27/E14/B15
CTQP22006	6W	AC185-265V	≥80	6500	Φ55*102mm	80lm/w	AL+Plastic	220°	E14
CTQP22008	8W	AC185-265V	≥80	6500	Φ60*108mm	80lm/w	AL+Plastic	220°	E14




A BULB

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle	Lamp head
CTQP20003	3W	AC100-240V	80	6500	Φ45*80mm	80lm/w	AL+Plastic	220°	E27
CTQP20005	5W	AC100-240V	80	6500	Φ55*100mm	90lm/w	AL+Plastic	220°	E22/E27
CTQP20007	7W	AC100-240V	80	6500	Φ60*110mm	90lm/w	AL+Plastic	220°	E27
CTQP20009	9W	AC100-240V	80	6500	Φ60*110mm	90lm/w	AL+Plastic	220°	E27
CTQP20011	11W	AC100-240V	80	6500	Φ65*118mm	90lm/w	AL+Plastic	220°	E27
CTQP20015	15W	AC100-240V	80	6500	Φ70*135mm	90lm/w	AL+Plastic	220°	E27




GU10

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle	Lamp head
CTGU1002003	3W	AC100-240V	≥80	6000	Φ50*53mm	80lm/w	AL+Plastic	38°	GU10
CTGU1002005	5W	AC100-240V	≥80	6000	Φ50*53mm	80lm/w	AL+Plastic	38°	GU10

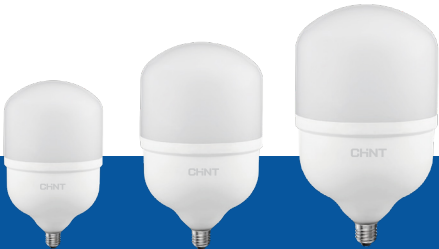

T BULB

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle	Lamp head
CTQP20018	18W	AC100-240V	80	6500	Φ78*133mm	88lm/w	AL+Plastic	200°	E27
CTQP20027	27W	AC100-240V	80	6500	Φ100*167mm	88lm/w	AL+Plastic	200°	E27
CTQP20036	36W	AC100-240V	80	6500	Φ125*200mm	88lm/w	AL+Plastic	200°	E27
CTQP20045	45W	AC100-240V	80	6500	Φ140*210mm	88lm/w	AL+Plastic	200°	E27

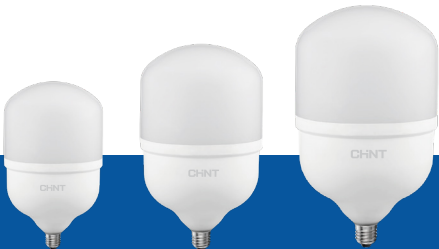

T BULB

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle	Lamp head
CTQP2302	20W	AC220-240V	80	6500	Φ80*148mm	90lm/w	AL+Plastic	200°	E27
CTQP2303	30W	AC220-240V	80	6500	Φ100*171mm	90lm/w	AL+Plastic	200°	E27
CTQP2304	40W	AC220-240V	80	6500	Φ118*211mm	90lm/w	AL+Plastic	200°	E27
CTQP2305	50W	AC220-240V	80	6500	Φ138*240mm	90lm/w	AL+Plastic	200°	E27
CTQP2306	60W	AC220-240V	80	6500	Φ160*279mm	90lm/w	AL+Plastic	200°	E27



A BULB

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle	Lamp head
CTQP23003	3W	AC176-264V	80	6500	Φ45*78mm	90lm/w	AL+Plastic	220°	B22/E27
CTQP23005	5W	AC176-264V	80	6500	Φ55*99mm	90lm/w	AL+Plastic	220°	B22/E27
CTQP23007	7W	AC176-264V	80	6500	Φ60*107mm	90lm/w	AL+Plastic	220°	B22/E27
CTQP23009	9W	AC176-264V	80	6500	Φ60*107mm	90lm/w	AL+Plastic	220°	B22/E27
CTQP23011	12W	AC176-264V	80	6500	Φ65*112mm	90lm/w	AL+Plastic	220°	B22/E27
CTQP23015	15W	AC176-264V	80	6500	Φ70*140mm	90lm/w	AL+Plastic	220°	B22/E27
CTQP23015	18W	AC176-264V	80	6500	Φ70*140mm	90lm/w	AL+Plastic	220°	B22/E27



T8 GLASS TUBE



Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTT805009	9W	AC100-240V	≥70	6500	588*26mm	100lm/w	Glass	270°
CTT805018	18W	AC100-240V	≥70	6500	1198*26mm	100lm/w	Glass	270°
CTT805022	22W	AC100-240V	≥70	6500	1198*26mm	100lm/w	Glass	270°



T8 GLASS TUBE




Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTT815009	9W	AC176-264V	≥70	6500	588*26mm	100lm/w	Glass	270°
CTT815018	18W	AC176-264V	≥70	6500	1198*26mm	100lm/w	Glass	270°
CTT815022	22W	AC176-264V	≥70	6500	1198*26mm	100lm/w	Glass	270°



T5 BRANKET LIGHT

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTT507004	4W	AC176-264V	≥70	6500	325*22.1*31.6mm	100lm/w	PC	150°
CTT507008	8W	AC176-264V	≥70	6500	584*22.1*31.6mm	100lm/w	PC	150°
CTT507012	12W	AC176-264V	≥70	6500	883*22.1*31.6mm	100lm/w	PC	150°
CTT507014	14W	AC176-264V	≥70	6500	1004*22.1*31.6mm	100lm/w	PC	150°
CTT507016	16W	AC176-264V	≥70	6500	1188*22.1*31.6mm	100lm/w	PC	150°
CTT507022	22W	AC176-264V	≥70	6500	1188*22.1*31.6mm	100lm/w	PC	150°

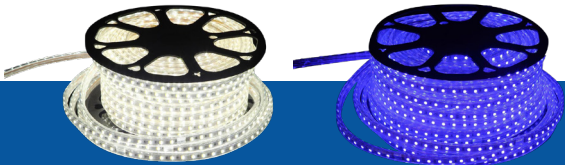

LED STRIP

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Material	Beam Angle
CTDD132835RGB	3W	AC220-240V	70	RGB	13.5*6mm	PVC	120°
CTDD132835	7.5W	AC220-240V	70	6500	13.5*6mm	PVC	120°
CTDD142835	10W	AC220-240V	70	6500	13.5*6mm	PVC	120°
CTDD075050	6.5W	AC220-240V	70	6500	14*7mm	PVC	120°
CTDD065050	10W	AC220-240V	70	RGB	15.5*7.5mm	PVC	120°



MENTAL DOWNLIGHT

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTTD09003	3W	AC100-240V	≥80	6500	Φ98*54mm	65lm/w	AL+Plastic	120°
CTTD09005	5W	AC100-240V	≥80	6500	Φ108*52mm	65lm/w	AL+Plastic	120°
CTTD09008	8W	AC100-240V	≥80	6500	Φ138*60mm	60lm/w	AL+Plastic	120°



PLASTIC DOWNLIGHT

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTTD10003	3W	AC176-264V	≥80	6500	Φ100*34mm	66lm/w	Plastic	120°
CTTD10005	5W	AC176-264V	≥80	6500	Φ100*34mm	66lm/w	Plastic	120°
CTTD10007	7W	AC176-264V	≥80	6500	Φ88*55mm	75lm/w	Plastic	120°
CTTD10012	12W	AC176-264V	≥80	6500	Φ120*64mm	80lm/w	Plastic	120°



SURFACE DOWNLIGHT

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTPB10006	6W	AC90-264V	80	6000	120*120*31.5mm	50lm/w	AL+Plastic	120°
CTPB10012	12W	AC90-264V	80	6000	170*170*31.5mm	60lm/w	AL+Plastic	120°
CTPB10018	18W	AC90-264V	80	6000	225*225*31.5mm	65lm/w	AL+Plastic	120°
CTPB10024	24W	AC90-264V	80	6000	300*300*31.5mm	75lm/w	AL+Plastic	120°



RECESSED DOWNLIGHT

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTPB09003	3W	AC90-264V	80	6000	Φ85*15mm	40lm/w	AL+Plastic	120°
CTPB09006	6W	AC90-264V	80	6000	Φ120*15mm	50lm/w	AL+Plastic	120°
CTPB09009	9W	AC90-264V	80	6000	Φ145*15mm	60lm/w	AL+Plastic	120°
CTPB09012	12W	AC90-264V	80	6000	Φ170*15mm	60lm/w	AL+Plastic	120°
CTPB09015	15W	AC90-264V	80	6000	Φ200*15mm	60lm/w	AL+Plastic	120°
CTPB09018	18W	AC90-264V	80	6000	Φ225*15mm	65lm/w	AL+Plastic	120°
CTPB09024	24W	AC90-264V	80	6000	Φ300*15mm	65lm/w	AL+Plastic	120°



PANEL LIGHT

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTPB15024	24W	AC100-240V	80	6500	295*595*35mm	75lm/w	AL+Plastic	120°
CTPB15030	30W	AC100-240V	80	6500	295*595*35mm	75lm/w	AL+Plastic	120°
CTPB15036	36W	AC100-240V	80	6500	595*595*35mm	100lm/w	AL+Plastic	120°
CTPB16040	40W	AC100-240V	80	6500	595*595*35mm	120lm/w	AL+Plastic	120°
CTPB16048	40W	AC100-240V	80	6500	595*595*35mm	120lm/w	AL+Plastic	120°
CTPB15048	48W	AC100-240V	80	6500	595*595*35mm 295*1195*35mm	93lm/w	AL+Plastic	120°



CEILING LAMP

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTXD99015	15W	AC100-240V	80	6500	Φ245*50±2mm	63lm/w	AL+Plastic	120°
CTXD99018	18W	AC100-240V	80	6500	Φ320*50±2mm	63lm/w	AL+Plastic	120°
CTXD99024	24W	AC100-240V	80	6500	Φ370*50±2mm	62lm/w	AL+Plastic	120°
CTXD100015	15W	AC100-240V	80	6500	Φ245*50±2mm	63lm/w	AL+Plastic	120°
CTXD100018	18W	AC100-240V	80	6500	Φ320*50±2mm	63lm/w	AL+Plastic	120°
CTXD100024	24W	AC100-240V	80	6500	Φ370*50±2mm	62lm/w	AL+Plastic	120°
CTXD101015	15W	AC100-240V	80	6500	Φ245*50±2mm	63lm/w	AL+Plastic	120°
CTXD101018	18W	AC100-240V	80	6500	Φ320*50±2mm	63lm/w	AL+Plastic	120°
CTXD101024	24W	AC100-240V	80	6500	Φ370*50±2mm	62lm/w	AL+Plastic	120°



CEILING LAMP

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTXD97012	12W	AC100-240V	80	6500	Φ263*57±2mm	60lm/w	AL+Plastic	120°
CTXD97012	18W	AC100-240V	80	6500	Φ339*54±2mm	60lm/w	AL+Plastic	120°
CTXD97012	24W	AC100-240V	80	6500	Φ389*54±2mm	58lm/w	AL+Plastic	120°
CTXD98012	12W	AC100-240V	80	6500	Φ260*80±2mm	60lm/w	AL+Plastic	120°
CTXD98012	18W	AC100-240V	80	6500	Φ330*97±2mm	60lm/w	AL+Plastic	120°
CTXD98012	24W	AC100-240V	80	6500	Φ380*106±2mm	58lm/w	AL+Plastic	120°



NIGHT LIGHT 01

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	luminous flux	Notes
CTXYD0103-1	3W	DC5V	80	6000	Φ80*47mm	20lm	Touch type/Long press infinite dimming/Built in lithium battery
CTXYD0103-2	3W	DC5V	80	6000	Φ80*47mm	20lm	Pyroelectric induction/Long press infinite dimming/Built in lithium battery



NIGHT LIGHT 02

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	luminous flux	Notes
CTXYD0203-1	3W	DC5V	80	6000	100*38*38mm	30lm	Touch type/Built in lithium battery
CTXYD0203-2	3W	DC5V	80	6000	100*38*38mm	30lm	Key switch/Tri color cycle/Built in lithium battery
CTXYD0203-3	3W	DC5V	80	6000	100*38*38mm	30lm	Pyroelectric induction/Built in lithium battery
CTXYD0203-4	3W	DC5V	80	6000	261*43*43mm	50lm	Pyroelectric induction/Built in lithium battery




NIGHT LIGHT 03

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	luminous flux	Notes
CTXYD0404581-1	4.5W	DC5V	80	R/G/B	120*120*116mm	70lm	Silent projection/Cute Dog/Built in lithium battery
CTXYD0404581-2	4.5W	DC5V	80	R/G/B	120*120*116mm	70lm	Silent projection/Greedy Cat/Built in lithium battery
CTXYD0404581-3	4.5W	DC5V	80	R/G/B	120*120*116mm	70lm	Projection 5-tone loop playback/Cute Dog
CTXYD0404581-4	4.5W	DC5V	80	R/G/B	120*120*116mm	70lm	Projection 5-tone loop playback/Greedy Cat



HIGH BAY

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTGK11100	100W	100-277V	>70	6000	Φ253*149mm	130lm/w	AL	90°
CTGK11150	150W	100-277V	>70	6000	Φ322*153mm	130lm/w	AL	90°
CTGK11200	200W	100-277V	>70	6000	Φ346*163mm	130lm/w	AL	90°

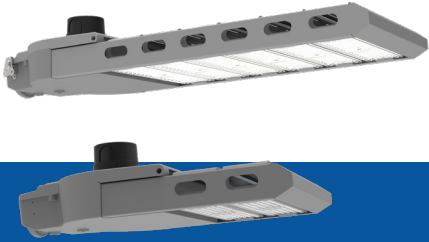

STREET LIGHT

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTSL06050	50W	AC100-240V	>70	6500	431*313*91mm	140lm/w	AL+Plastic	75°~150°
CTSL060100	100W	AC100-240V	>70	6500	511*313*91mm	140lm/w	AL+Plastic	75°~150°
CTSL060150	150W	AC100-240V	>70	6500	591*313*91mm	140lm/w	AL+Plastic	75°~150°
CTSL060240	200W	AC100-240V	>70	6500	671*313*91mm	140lm/w	AL+Plastic	75°~150°
CTSL06050	50W	AC100-240V	>70	6500	431*313*91mm	140lm/w	AL+Plastic	75°~150°
CTSL06050	100W	AC100-240V	>70	6500	511*313*91mm	140lm/w	AL+Plastic	75°~150°
CTSL06050	150W	AC100-240V	>70	6500	591*313*91mm	140lm/w	AL+Plastic	75°~150°
CTSL06050	200W	AC100-240V	>70	6500	671*313*91mm	140lm/w	AL+Plastic	75°~150°



FLOOD LIGHT TG14

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTTG14010	10W	AC200-240V	>70	6500	95*81*21mm	77lm/w	AL	110°
CTTG14020	20W	AC200-240V	>70	6500	134*108*22mm	85lm/w	AL	110°
CTTG14030	30W	AC200-240V	>70	6500	157*128*22mm	87lm/w	AL	110°
CTTG14050	50W	AC200-240V	>70	6500	206*166*23mm	88lm/w	AL	110°
CTTG14070	70W	AC200-240V	>70	6500	247.5*195*29mm	88lm/w	AL	110°
CTTG14100	100W	AC200-240V	>70	6500	284*221.5*30.5mm	91lm/w	AL	110°
CTTG14150	150W	AC200-240V	>70	6500	343.5*255*42mm	93lm/w	AL	110°
CTTG14200	200W	AC200-240V	>70	6500	388.5*290*52mm	92lm/w	AL	110°



FLOOD LIGHT TG15

Model No	Power	Volatge(AC)	RA	CCT(K)	Dimension	Efficacy	Material	Beam Angle
CTTG15010	10W	AC100-240V	>70	6500	104*86*22mm	81lm/w	AL	110°
CTTG15020	20W	AC100-240V	>70	6500	134*109*24mm	81lm/w	AL	110°
CTTG15030	30W	AC100-240V	>70	6500	175*136.5*25mm	81lm/w	AL	110°
CTTG15050	50W	AC100-240V	>70	6500	210*163*28mm	81lm/w	AL	110°
CTTG15100	100W	AC100-240V	>70	6500	245*180*36mm	81lm/w	AL	110°
CTTG15150	150W	AC100-240V	>70	6500	374*276*38mm	81lm/w	AL	110°
CTTG15200	200W	AC100-240V	>70	6500	416*295.8*38mm	81lm/w	AL	110°



ZHEJIANG CHINT LIGHTING CO., LTD.

ADD: 1335 Bin' an Road, Binjiang District, Hangzhou, Zhejiang.

TEL: +86-571-56058237

FAX: +86-571-56758702

CHINT LIGHTING All Rights Reserved

Recycle Paper Printed

Specifications and technical data are subject to change without notice. Please contact us to confirm relevant information on ordering.